


# KENT HYDRA RAMS 1GII, 2GII & 3GII

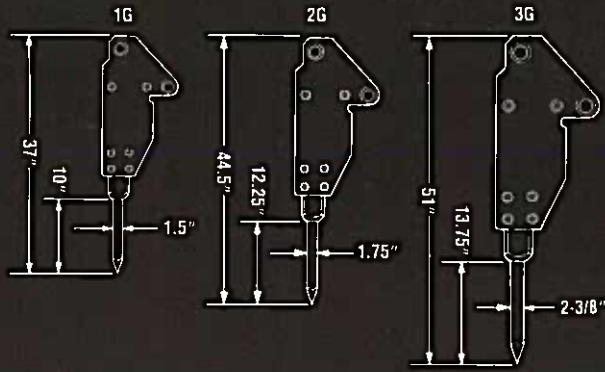

The highly productive Model 1G, 2G and 3G Kent Hydra Rams are designed for use on rubber-tired backhoes, skid steer loaders, and mini-excavators. Their small size and efficient power to weight ratio contribute to outstanding maneuverability and versatility in tight quarters. These durably built, lightweight hammers are ideally suited for light concrete demolition and road repair. Like all of Kent's efficiently designed Hydra Rams, these models do not require in-line oil coolers under normal working conditions.

#### Features/Benefits

- Nitrogen charged back head for superior impact energy.
- Square breaker body encased by heavy-duty sideplates for strength and rigidity.
- Variable blows adapts tool and carrier to job requirements.
- Innovative valve design suppresses hydraulic pulsation which can be harmful to carrier.
- Standard working steel of your choice with mounting pins included at no additional charge.
- Replaceable front head bushings
- Centralized arrangement of major parts permit easy access and maintenance.
- Custom bracketing available for most skid steer models.

	1G	2G	3G
Bracket Type	Top	Top	Top
Weight	145 lbs. (65.77 kg)	238.5 lbs. (108.18 kg)	452 lbs. (205.02 kg)
Length (w/Brkt.)	37 in. (939.8 mm)	44.5 in. (1130.3 mm)	51 in. (1295.4 mm)
Blows/Minute (variable)	700-1500	650-1500	550-1200
Impact Energy Class	150 ft/lbs (20.73 kg/m)	200 ft/lbs (27.65 kg/m)	500 ft/lbs (69.13 kg/m)
Oil Flow	2.5-5.3 GPM (9-20 LPM)	4-8 GPM (16-32 LPM)	6.5-13 GPM (26-52 LPM)
Operating Pressure	1425-1700 PSI (108-120 kg/cm <sup>2</sup> )	1400-1700 PSI (99-120 kg/cm <sup>2</sup> )	1565-1850 PSI (110-130 kg/cm <sup>2</sup> )
Tool Dia.	1.5 in. (36 mm)	1.75 in. (44.45 mm)	2-3/8 in. (63.5 mm)
Usable working steel	10 in. (254 mm)	12.25 in. (311 mm)	13.75 in. (350 mm)



711 Lake Street • Kent, Ohio 44240  
330-673-5826 • Fax: 330-677-1616  
Toll Free: 1-800-527-2282 (East Coast) • 1-800-624-1616 (West Coast)

