



Introducing the New HP65 II 18" Compactor

A powerful, high frequency compactor designed for narrow trenches limited to 18" widths.

Furukawa Rock Drill, Breaker/Attachment Division, introduces the HydraPak HP65 II 18" compactor/driver. This narrow compactor combines all the benefits available in its larger predecessors with a footprint of 18".

This new compactor provides high frequency vibration with greater impact power to make quick work of any compaction or driving task. For use on small and medium excavators or backhoes, these HydraPaks are designed to work anywhere a boom can reach – in trenches, around foundations, on slopes or seawalls.

This compactor is built for rugged, reliable performance with hardened steel components to resist the effects of stress, vibration, fatigue and impact forces.

Specifications:


Impulse Force lbs. (kg)	6,500 (2,948)
Cycles per minute	2,000
Operating Pressure PSI (BAR)	2,000-2,400 (138-165)
Hydraulic Flow Req'd GPM (LPM)	12-15 (45-57)
*Approx weight in lbs (kg)	742 (336)
*Approx height in inches (mm)	27.5 (702)
Width in inches (mm)	18 (457)
Pin Spacing	As required
Mounting Pin Dia	As required
Base Plate Dimensions	
in inches (mm)	18 x 34 (457 x 864)
Compaction Area Sq Ft (sq m)	4.25 (.39)
Hose Size	
Pressure Line Inches (mm)	.75 (19)
Return Line Inches (mm)	.75 (19)

HydraPak Hanger Options

HP65 II



SwitchHitch mounting for most backhoes utilizing quick couplers	"Floating-hess" mounting for carriers requiring OEM pin centers	For carriers utilizing Wain-Roy® couplers	For carriers requiring special, OEM bolt-on top cap (Top cap sold separately)	For carriers utilizing CP® couplers
TLB	FB	WR	FT	CP

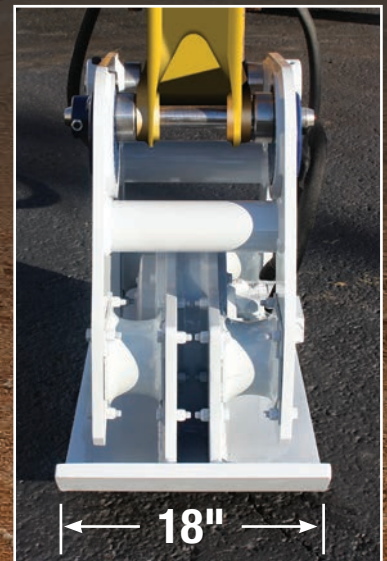

www.frdusa.com

CORPORATE HEADQUARTERS
711 Lake Street Kent, OH 44240
Ph: 330-673-5826
Fax: 330-677-1616
Toll Free: 1-800-527-2282

SOUTHEAST SALES AND SERVICE FACILITY
155 Dexter Road
Spartanburg, SC 29303
Ph: 864-541-0125

** Weight and height are specific for a HydraPak with the Flat Top Hanger option, less the mounting bracket. For accurate weight and height for models utilizing a different or specific hanger arrangement, please contact our FRD's Product Support Department.*