



F100 Qt

When you need to move mountains call on the F100 Qt. This hammer is the largest in the F Series built for use on excavators in the 72 – 110 ton class. As large as this hammer is, we still build in the quiet technology you have become accustomed to. Our blow frequency adjuster tailors the carrier and hammer to your workload improving overall efficiency. Upper and lower seal retainers protect against cylinder failure due to contamination. Retainer pins are reversible to double their life and reduce parts maintenance. All hammers come complete with exclusive Pro-Pak for ease of installation. The Pro-Pak includes hose whips, mounting hardware, standard working steel and tool kit and operating manual at no additional charge.


Features and Benefits:

- A Blow Frequency Adjuster Allows the Operator to Match Impact to Job
- Upper & Lower Seal Retainers to Prevent Premature Cylinder Failure
- Hydraulic Oil Flow Consumption is Self-Regulated and Adjustable at the Hammer Valve
- Dual Reversible Retainer Pins for Double the Service Life
- A Steel Sound Proof Cover
- Two Front Head Grease Points for Efficient Tool Lubrication



IMPACT ENERGY CLASS	15,000 ft. lbs.
Weight in lbs. (kg)	17,390 (7,887)
Length in inches (mm)	176.50 (4,483)
Diameter in inches (mm)	8.27 (210)
Adjustable BPM	200 ~ 350
Acceptable GPM Range (LPM)	74 ~ 103 (280 ~ 390)
Acceptable PSI Range (Bar)	2,320 ~ 2,610 (160 ~ 180)
Recommended Carrier in U.S. Tons	72 ~ 110
Carrier Options	■

Note: 1. Weight and length for all versions include working steel and "Universal" top cap.

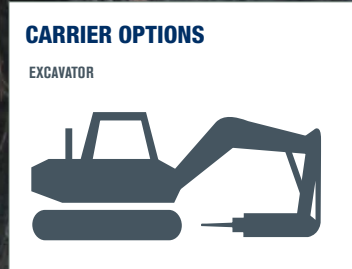

www.frdusa.com

CORPORATE HEADQUARTERS
 711 Lake Street Kent, OH 44240
Ph: 330-673-5826
Fax: 330-677-1616
Toll Free: 1-800-527-2282

SOUTHEAST SALES AND SERVICE FACILITY
 155 Dexter Road
 Spartanburg, SC 29303
Ph: 864-541-0125